
www.peimar.com

PEIMAR
ITALIAN PHOTOVOLTAIC MODULES

OR10H450MNDB (BF)

OR Series - 450 W

108 cells
MONO M10 HALF | N-TYPE

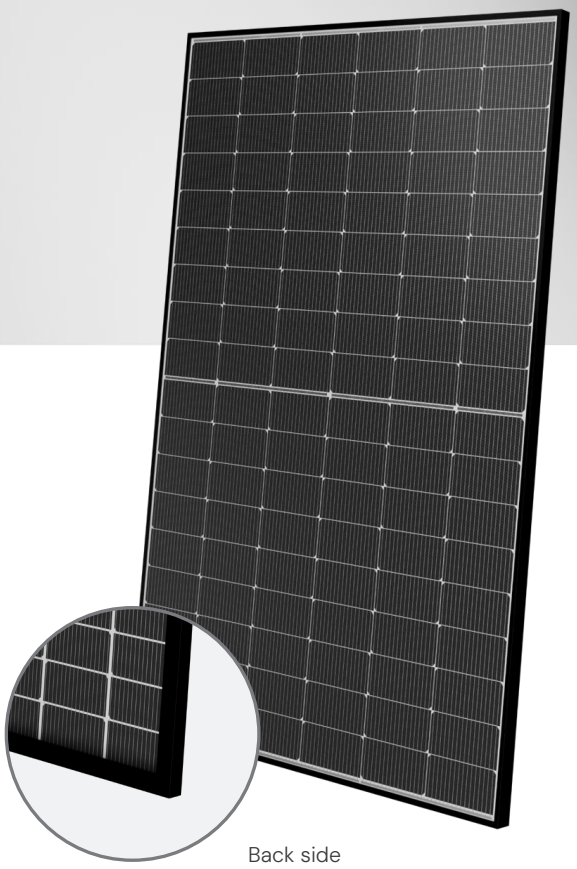

Back side

TOPCon bifacial technology

Anti-reflective double glass
Maximum efficiency and high performance

Compact and sturdy frame
Anchorable also on the short side (5)

Module fire performance:
Class 1

30 years
Linear power warranty

25 years
Product warranty

QBE

QBE insurance
QBE Product Liability Insurance

QBE is a global leader in the insurance sector, offering comprehensive solutions for business risk management. With a worldwide network, it protects clients against a wide range of risks and provides flexible insurance solutions tailored to various industries, including the energy sector.

It is important to point out, that all technical specifications, information and figures contained in this datasheet are estimated values.
Peimar reserves the right to change the technical specifications, information and figures contained in this document at any time without notice.

OR10H450MNDB (BF)

Electrical Characteristics (STC) [1]

Nominal Output (Pmax) [2]	450 W
Sorting Tolerance	0/+5 W
Voltage at Pmax (Vmp)	33,25 V
Current at Pmax (Imp)	13,53 A
Open Circuit Voltage (Voc) [2]	38,99 V
Short Circuit Current (Isc) [2]	14,25 A
Maximum System Voltage	1500 V
Maximum Series Fuse Rating	30 A
Module Efficiency	23,04% | 22,52%
Protection class against electric shock	Class II

1. STC: (Standard Test Condition) Irradiance 1000 W/m²; Module Temperature 25 °C; Air Mass 1,5

2. Pmax, Voc, Isc measurement tolerance: ±3%

Electrical Characteristics with rear side power gain

Pmax gain	5%	10%	15%	20%	25%
Nominal Output (Pmax)	472 W	495 W	517 W	540 W	562 W
Voltage at Pmax (Vmp)	33,25 V	33,25 V	33,25 V	33,25 V	33,25 V
Current at Pmax (Imp)	14,21 A	14,88 A	15,56 A	16,24 A	16,91 A
Open Circuit Voltage (Voc)	38,99 V	38,99 V	38,99 V	38,99 V	38,99 V
Short Circuit Current (Isc)	14,96 A	15,68 A	16,39 A	17,10 A	17,81 A

Mechanical Characteristics

Solar Cells	108 M10 HALF monocrystalline **N-TYPE**
Solar Cells Size	182 x 91 mm / 7,16 x 3,58"
Front Cover	2,0 mm / 0,08" thick, low iron tempered glass
Back Cover	2,0 mm / 0,08" thick, low iron tempered glass
Encapsulant	EVA / POE
Frame	Anodized aluminium alloy, double wall
Frame finishing	Black
Diodes	3 Bypass diodes serviceable
Junction Box	IP68 rated
Connector	MC4 or compatible connector
Cables Lenght	1100 mm / 43,30"
Cables Section	4,0 mm² / 0,006 in²
Dimensions	1722 x 1134 x 30 mm / 67,79 x 44,64 x 1,18" 1762 x 1134 x 30 mm / 69,37 x 44,64 x 1,18"
Weight	23,24 kg / 51,2 lbs - 23,77 kg / 52,4 lbs
Max Load (Test Load) - SF	5400 Pa - 1,5 [5]

5. Consult the installation manual for the relative mounting configurations

Temperature Characteristics

NMOT [3]	43±2 °C
Temperature Coefficient of Pmax	-0,29 %/°C
Temperature Coefficient of Voc	-0,25 %/°C
Temperature Coefficient of Isc	0,046 %/°C
Operating Temperature	-40 °C ~ +85 °C

3. NMOT: Nominal Module Operating Temperature: Irradiance 800 W/m²; Air 20 °C; Wind speed 1 m/s

Packaging [4]


Pallet dimensions	Pieces per pallet - Weight
1750 x 1130 x 1265 mm / 68,9 x 44,5 x 49,8"	36 pcs - 864 kg / 1904,8 lbs
1750 x 1130 x 1265 mm / 68,9 x 44,5 x 49,8"	37 pcs - 888 kg / 1957,7 lbs
1780 x 1130 x 1265 mm / 70,1 x 44,5 x 49,8"	36 pcs - 883 kg / 1946,68 lbs

4. Pallets can be stacked up to two


Certifications


Fire Resistance Rating	Class of reaction to fire 1 (UNI 9177)
Product Certificate	IEC 61215-1, IEC 61215-1-1, IEC 61215-2, IEC 61730-1, IEC 61730-2

Dimensions

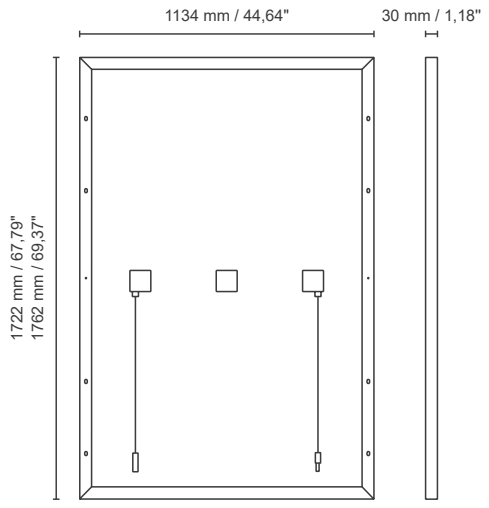

Current/Voltage Characteristics

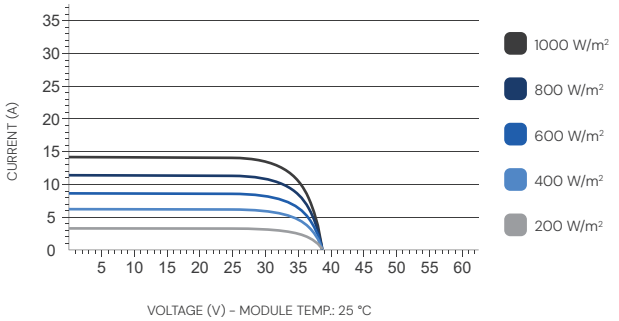

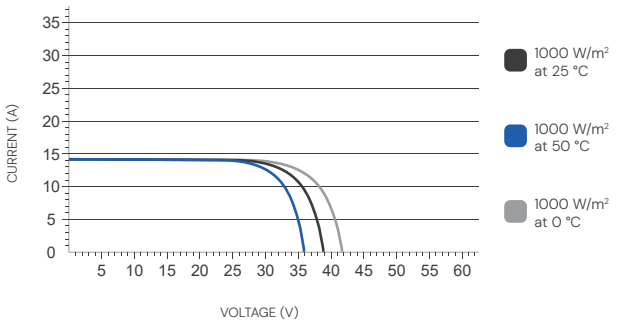

PEIMAR
ITALIAN PHOTOVOLTAIC MODULES